

**图示(Pic. shown) : TLPSW-302V-05P-G12**


General.	PCB Connector Rated : 320V,12A , 2.5mm <sup>2</sup>
	Single row , 5.08mm pitch , 02-24 Pole
	Wiring orientation: 180°(wire to plug-in )
	Spring clamp unit.

认证 ( Approval ) :



技术参数 Technical Data	UL standard			IEC standard		
	UL Application group			IEC过电压别/污染等级(IEC overvoltage category /pollution degree)		
UL应用组别(UL Application group)	UL Application group			IEC过电压别/污染等级(IEC overvoltage category /pollution degree)		
IEC过电压别/污染等级(IEC overvoltage category /pollution degree)	B	C	D	III / 3	III / 2	II / 2
额定电压(Rated voltage)	300V	--	300V	--	320V	--
额定电流(Rated current)	12A	--	10A	--	12A	--
额定连接容量(Rated connection capacity)	24-12AWG Sol&Str			0.25-2.5mm <sup>2</sup>		
绝缘材料(Insulation Material)				PA66 UL94 V-0		
电流承载部件材料和镀层( Material & Plating of Current carrier )				Copper alloy , Tin plated		
接线弹片材料(Material of Clamp spring )				--		
绝缘电阻(Insulation Resistance)				500MΩ or more at DC500V		
耐电压(1分钟)(Withstanding Voltage/1Min)				2200V		
额定冲击电压(Rated surge voltage)				--		
接线螺丝(Wire clamp unit Screw) , 最大扭矩( torque Max. )				--		
固定螺丝(Mounting Screw) , 扭矩(torque)				M2.5 , 0.25Nm Max		
剥线长度(Wire stripping length)				10.0mm		
使用温度(Operating temperature)				-40°C up to +105°C		
焊接方式(Soldering recommend)				--		

**订购方式(How to order)**

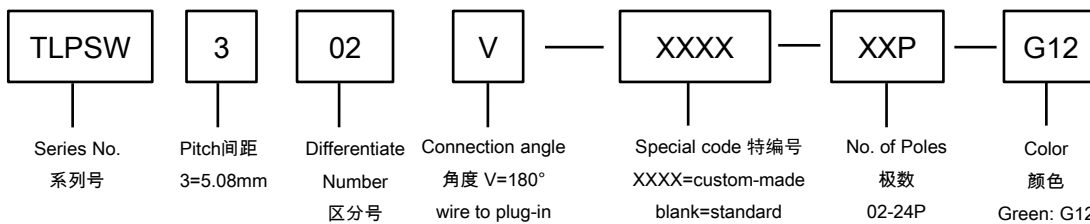

针座 ( Pin header ) — single row



P/N : TLPHW-300V  
Orientation :  
90° ( plug-in to board )  
Rated:320V,20A  
With threaded flange



P/N : TLPHW-300R  
Orientation :  
180° ( plug-in to board )  
Rated:320V,20A  
With threaded flange



P/N : TLPHW-300R-0544  
Orientation :  
180° ( plug-in to board )  
Rated:320V,20A  
With threaded flange



P/N : TLPHW-306  
Orientation :  
90° ( plug-in to board )  
Rated:320V,17.5A  
With threaded flange

针座 ( Pin header ) — dual row in 1 plane



P/N : TLPHDW-300V  
Orientation :  
90° ( plug-in to board )  
Rated:320V,17.5A  
With threaded flange



P/N : TLPHDW-300R  
Orientation :  
180° ( plug-in to board )  
Rated:320V,17.5A  
With threaded flange

针座 ( Pin header ) — dual row staggered



P/N : TLPHDW-303V  
Orientation :  
90° ( plug-in to board )  
Rated:320V,17.5A  
With threaded flange



P/N : TLPHDW-303R  
Orientation :  
180° ( plug-in to board )  
Rated:320V,17.5A  
With threaded flange