
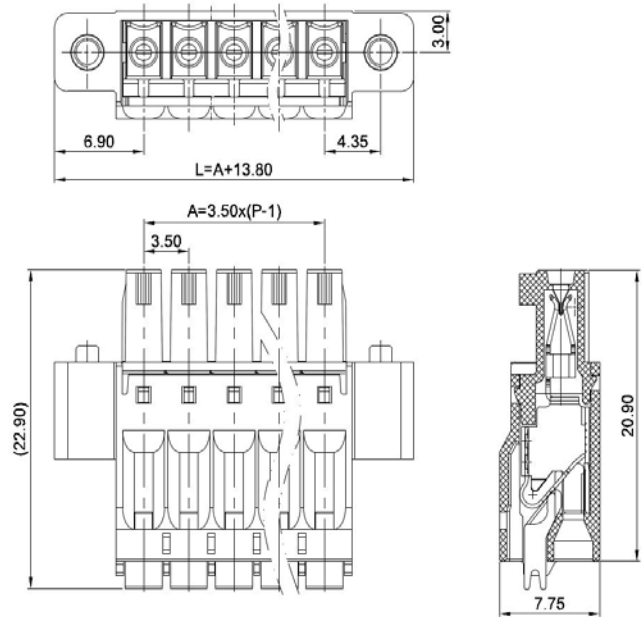


PCB Connector — TLP series (Female Connector)— TLPSW-007

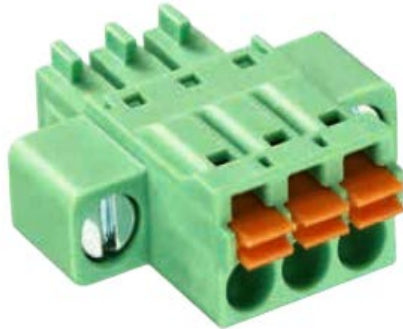


■ 图示(Pic. shown) : TLPSW-007-03P-G12

General:
 PCB Connector Rated : 160V,10A , 1.5mm²
 Single row, 3.50mm pitch , 02-24 Pole
 Wiring orientation: 180°(wire to plug-in)
 Spring clamp unit: M2.5

认证 (Approval) :

■ 技术参数 Technical Data	UL standard			IEC standard		
	UL Application group			IEC过电压别/污染等级(IEC overvoltage category /pollution degree)		
UL应用组别(UL Application group)	UL Application group			IEC过电压别/污染等级(IEC overvoltage category /pollution degree)		
IEC过电压别/污染等级(IEC overvoltage category /pollution degree)	B	C	D	III / 3	III / 2	II / 2
额定电压(Rated voltage)	300V	--	300V	--	160V	--
额定电流(Rated current)	8A	--	8A	--	10A	--
额定连接容量(Rated connection capacity)	28-16AWG Sol&Str			0.34-1.5mm ²		
绝缘材料(Insulation Material)				PA66 UL94 V-0		
电流承载部件材料和镀层(Material & Plating of Current carrier)				Copper alloy , Tin plated		
接线弹片材料(Material of Clamp spring)				--		
绝缘电阻(Insulation Resistance)				500MΩ or more at DC500V		
耐电压(1分钟)(Withstanding Voltage/1Min)				1600V		
额定冲击电压(Rated surge voltage)				--		
接线螺丝(Wire clamp unit Screw) , 最大扭矩(torque Max.)				--		
固定螺丝(Mounting Screw) , 扭矩(torque)				--		
剥线长度(Wire stripping length)				10.0mm		
使用温度(Operating temperature)				-40°C up to +115°C		
焊接方式(Soldering recommend)				--		

■ 订购方式(How to order)

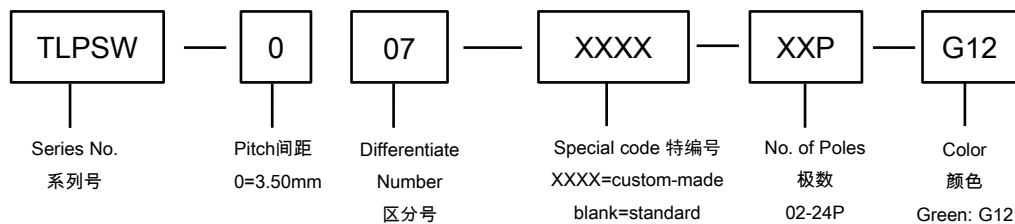

Web:www.china-tianli.com TEL:+86-574-6347-9600,6389-6436 Mail : sale@china-tianli.cn
 地址:中国浙江省宁波杭州湾新区庵东工业园区纬三路138号
 ADD : 138 , Weisan Rd.,Andong Development Zone, Hangzhou Bay Area, Ningbo, Zhejiang, China

■ 针座 (Pin header) — single row



P/N : TLPHW-001V
Orientation :
90° (plug-in to board)
Rated:150V,10A
With flange



P/N : TLPHW-001R
Orientation :
180° (plug-in to board)
Rated:150V,10A
With flange



P/N : TLPHW-004
Orientation :
135° (plug-in to board)
Rated:160V,10A
With flange

■ 针座 (Pin header) — dual row staggered



P/N : TLPHDW-005V
Orientation :
90° (plug-in to board)
Rated:160V,10A
With flange



P/N : TLPHDW-005R
Orientation :
180° (plug-in to board)
Rated:160V,10A
With flange

■ 针座 (Pin header) — dual row in 1 plane



P/N : TLPHDW-008V
Orientation :
90° (plug-in to board)
Rated:160V,10A
With flange



P/N : TLPHDW-008R
Orientation :
180° (plug-in to board)
Rated:160V,10A
With flange