

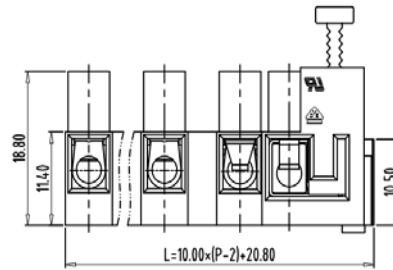
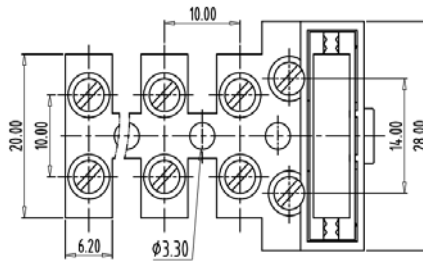


Fuse Terminal Block — TLF series — TLF-100EW-A

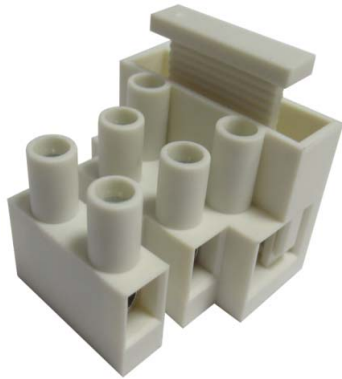


■ 图示(Pic. shown) : TLF-100EW-A-03P-W07S

| | |
|----------|---|
| General: | Fuse Terminal Block Rated : 450V,24A , 2.5mm ² |
| | Single row , 10.00mm pitch , 02-06 Pole |
| | Wire-to-Wire Connection |
| | Screw clamp unit: M3, 0.5Nm Max |

认证 (Approval) :

| 技术参数 Technical Data | UL standard | | | IEC standard | | |
|--|------------------------------|----|------|---|---------|--------|
| ◆ FUSE BLOCK | | | | | | |
| RATING | 300V, 13A, 20-14 AWG Sol&Str | | | 250V, 6.3A, 0.5-2.5mm ² | | |
| ◆ TERMINAL BLOCK | | | | | | |
| UL应用组别(UL Application group) | UL Application group | | | IEC过电压别/污染等级(IEC overvoltage category /pollution degree) | | |
| IEC过电压别/污染等级(IEC overvoltage category /pollution degree) | B | C | D | III / 3 | III / 2 | II / 2 |
| 额定电压(Rated voltage) | 300V | -- | 300V | -- | 450V | -- |
| 额定电流(Rated current) | 20A | -- | 10A | -- | 24A | -- |
| 额定连接容量(Rated connection capacity) | 18-12AWG Sol&Str | | | 0.5-2.5mm ² | | |
| 绝缘材料(Insulation Material) | | | | PA66 UL94 V-0 | | |
| 电流承载部件材料和镀层(Material & Plating of Current carrier) | | | | Copper alloy , Ni plated | | |
| 绝缘电阻(Insulation Resistance) | | | | 500MΩ or more at DC500V | | |
| 耐电压(1分钟)(Withstanding Voltage/1Min) | | | | Terminal Block: 2500V / Fuse Block: 2000V | | |
| 额定冲击电压(Rated surge voltage) | | | | -- | | |
| 接线螺丝(Wire clamp unit Screw) , 最大扭矩(torque Max.) | | | | M3 , 0.5Nm Max | | |
| 接地螺丝(Grounding Screw) , 扭矩(torque) | | | | -- | | |
| 剥线长度(Wire stripping length) | | | | Terminal Block: 7.0mm / Fuse Block: 7.0mm | | |
| 使用温度(Operating temperature) | | | | Terminal Block:-30°C up to +105°C / Fuse Block: -30°C up to +40°C | | |

■ 订购方式(How to order)

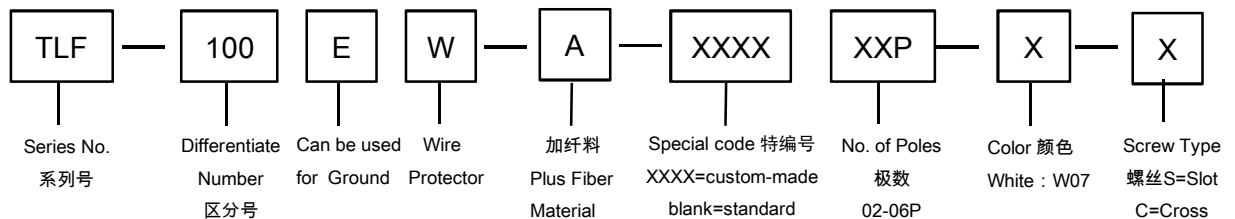

Web:www.china-tianli.com TEL:+86-574-6347-9600,6389-6436 Mail : sale@china-tianli.cn
地址:中国浙江省宁波杭州湾新区庵东工业园区纬三路138号
ADD : 138 , Weisan Rd.,Andong Development Zone, Hangzhou Bay Area, Ningbo, Zhejiang, China