
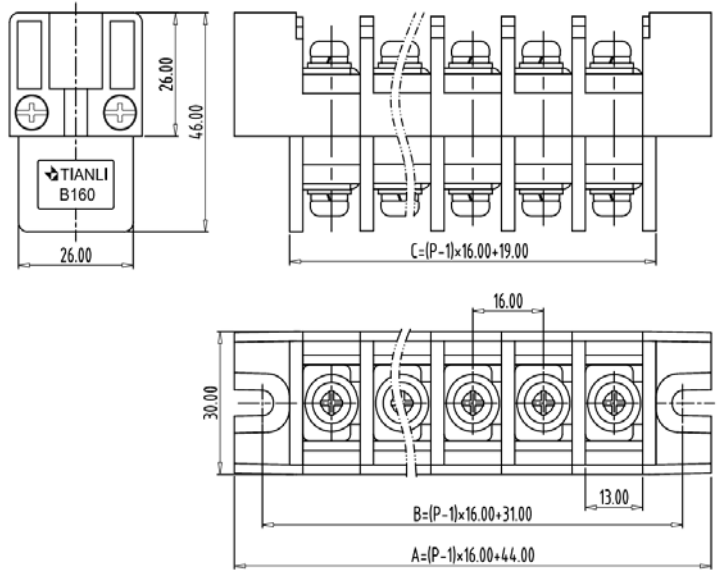


BARRIER SERIES — B160

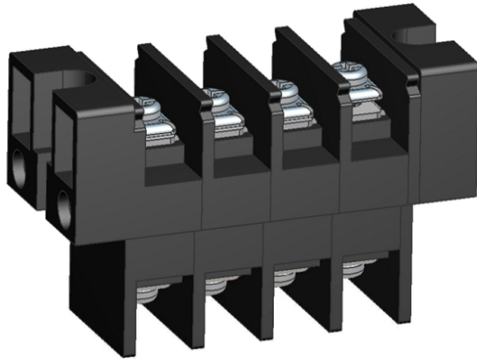

■ 图示(Pic. shown) : B160-04P-KC

General.	BARRIER SERIES Rated : 600V,76A , 14-4 Sol&Str
	16.0mm pitch , 02-16 Pole
	Screw clamp unit: M5, 2.0Nm Max

认证 (Approval) :

技术参数 Technical Data	UL standard			IEC standard		
UL应用组别(UL Application group)	UL Application group			IEC过电压别/污染等级(IEC overvoltage category /pollution degree)		
IEC过电压别/污染等级(IEC overvoltage category /pollution degree)	B	C	D	III / 3	III / 2	II / 2
额定电压(Rated voltage)	600V	600V	600V	--	--	--
额定电流(Rated current)	76A	76A	5A	--	--	--
额定连接容量(Rated connection capacity)	14-4AWG Sol&Str			--		
绝缘材料(Insulation Material)				PBT UL94 V-0		
电流承载部件材料和镀层(Material & Plating of Current carrier)				Copper alloy , Ni plated		
接线弹片材料(Material of Clamp spring)				--		
绝缘电阻(Insulation Resistance)				500MΩ or more at DC500V		
耐电压(1分钟)(Withstanding Voltage/1Min)				2200V		
额定冲击电压(Rated surge voltage)				--		
接线螺丝(Wire clamp unit Screw) , 最大扭矩(torque Max.)				M5 , 2.0Nm Max		
固定螺丝(Mounting Screw) , 扭矩(torque)				--		
剥线长度(Wire stripping length)				--		
使用温度(Operating temperature)				-40°C up to +120°C		
焊接方式(Soldering recommend)						

■ 订购方式(How to order)

