


BARRIER SERIES — B160C

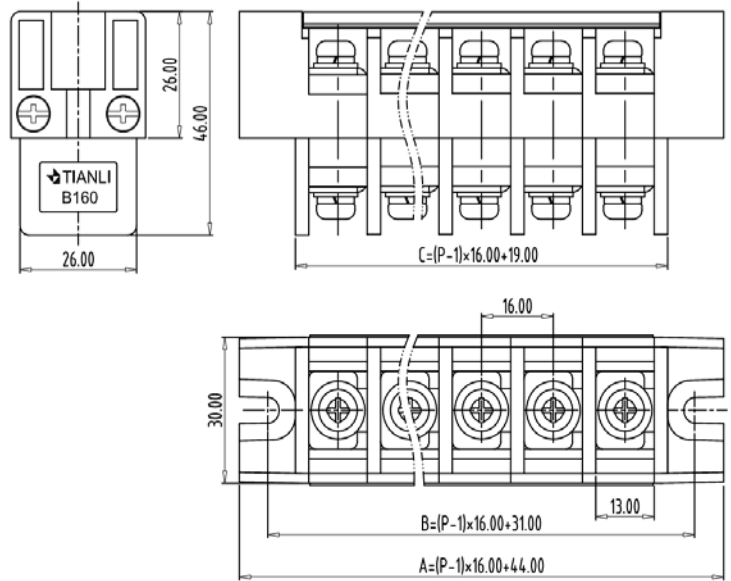


■ 图示(Pic. shown) : B160C-04P-KC

|          |  |
|----------|--|
| General. | BARRIER SERIES Rated : 600V,76A , 14-4 Sol&Str |
|          | 16.0mm pitch , 02-16 Pole                      |
|          | Screw clamp unit: M5, 2.0Nm Max                |

认证 ( Approval ) :

| 技术参数 Technical Data                                      | UL standard              |      |      | IEC standard   |         |        |
|--|--------------------------|------|------|--|---------|--------|
| UL应用组别(UL Application group)                             | UL Application group     |      |      | IEC过电压别/污染等级(IEC overvoltage category /pollution degree) |         |        |
| IEC过电压别/污染等级(IEC overvoltage category /pollution degree) | B                        | C    | D    | III / 3  | III / 2 | II / 2 |
| 额定电压(Rated voltage)                                      | 600V                     | 600V | 600V | --   | --      | --     |
| 额定电流(Rated current)                                      | 76A                      | 76A  | 5A   | --   | --      | --     |
| 额定连接容量(Rated connection capacity)                        | 14-4AWG Sol&Str          |      |      | --   |         |        |
| 绝缘材料(Insulation Material)                                | PBT UL94 V-0             |      |      |  |         |        |
| 电流承载部件材料和镀层( Material & Plating of Current carrier )     | Copper alloy , Ni plated |      |      |  |         |        |
| 接线弹片材料(Material of Clamp spring )                        | --                       |      |      |  |         |        |
| 绝缘电阻(Insulation Resistance)                              | 500MΩ or more at DC500V  |      |      |  |         |        |
| 耐电压(1分钟)(Withstanding Voltage/1Min)                      | 2200V                    |      |      |  |         |        |
| 额定冲击电压(Rated surge voltage)                              | --                       |      |      |  |         |        |
| 接线螺丝(Wire clamp unit Screw) , 最大扭矩( torque Max. )        | M5 , 2.0Nm Max           |      |      |  |         |        |
| 固定螺丝(Mounting Screw) , 扭矩(torque)                        | --                       |      |      |  |         |        |
| 剥线长度(Wire stripping length)                              | --                       |      |      |  |         |        |
| 使用温度(Operating temperature)                              | -40°C up to +120°C       |      |      |  |         |        |
| 焊接方式(Soldering recommend)                                |                          |      |      |  |         |        |

■ 订购方式(How to order)

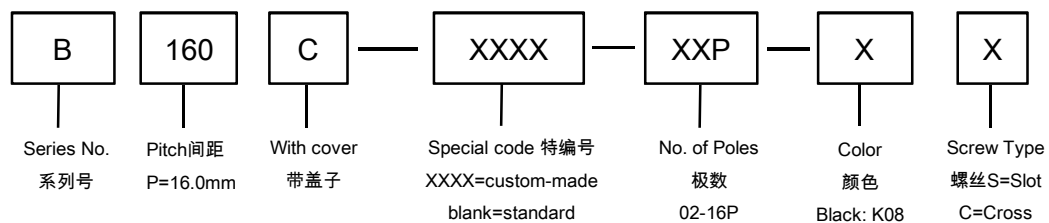

Web: [www.china-tianli.com](http://www.china-tianli.com) TEL: +86-574-6347-9600, 6389-6436 Mail : [sale@china-tianli.cn](mailto:sale@china-tianli.cn)  
 地址: 中国浙江省宁波杭州湾新区庵东工业园区纬三路138号  
 ADD : 138 , Weisan Rd., Andong Development Zone, Hangzhou Bay Area, Ningbo, Zhejiang, China