



RAILMOUNTED TERMINAL BLOCKS — TBD30

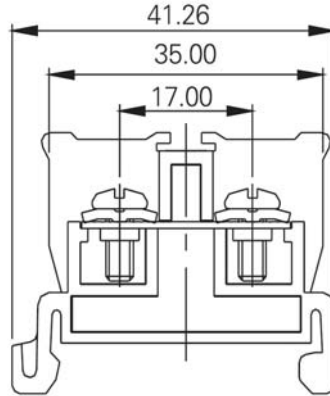

| | |
|----------|--|
| General: | 图示(Pic. shown) : TBD30-K |
| | Railmounted terminal Blocks Rated : 300V,30A , 10AWG |
| | Single row ,12.0mm pitch , 01 Pole |
| | Wiring orientation: 180°(wire-to-wire) |
| | Screw clamp unit: M3.5, 0.8N.m Max |

认证 (Approval) :

| 技术参数 Technical Data | UL standard | | | IEC standard | | |
|--|----------------------|------|----|--|---------|--------|
| UL应用组别(UL Application group) | UL Application group | | | IEC过电压别/污染等级(IEC overvoltage category /pollution degree) | | |
| IEC过电压别/污染等级(IEC overvoltage category /pollution degree) | B | C | D | III / 3 | III / 2 | II / 2 |
| 额定电压(Rated voltage) | 300V | 300V | -- | -- | -- | -- |
| 额定电流(Rated current) | 30A | 30A | -- | -- | -- | -- |
| 额定连接容量(Rated connection capacity) | 22-10AWG Sol&Str | | | -- | | |
| 绝缘材料(Insulation Material) | | | | PC V2 | | |
| 电流承载部件材料和镀层(Material & Plating of Current carrier) | | | | Copper alloy , Ni plated | | |
| 接线弹片材料(Material of Clamp spring) | | | | -- | | |
| 绝缘电阻(Insulation Resistance) | | | | 500MΩ or more at DC500V | | |
| 耐电压(1分钟)(Withstanding Voltage/1Min) | | | | 2500V | | |
| 额定冲击电压(Rated surge voltage) | | | | -- | | |
| 接线螺丝(Wire clamp unit Screw) , 最大扭矩(torque Max.) | | | | M3.5, 0.8N.m Max | | |
| 固定螺丝(Mounting Screw) , 扭矩(torque) | | | | -- | | |
| 剥线长度(Wire stripping length) | | | | -- | | |
| 使用温度(Operating temperature) | | | | -40°C up to +125°C | | |
| 焊接方式(Soldering recommend) | | | | -- | | |

订购方式(How to order)

