
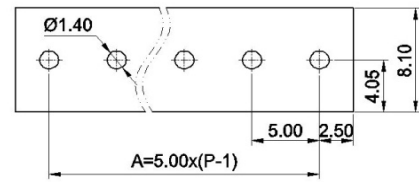
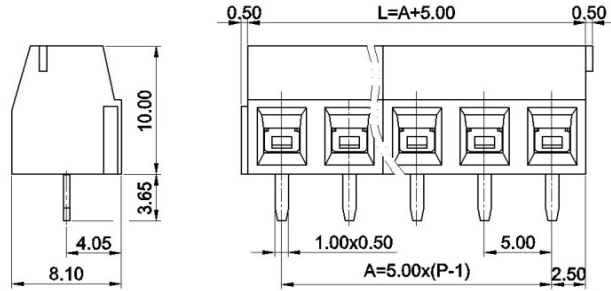


PCB terminal block — TL series ( Raising Clamp )— TL208V

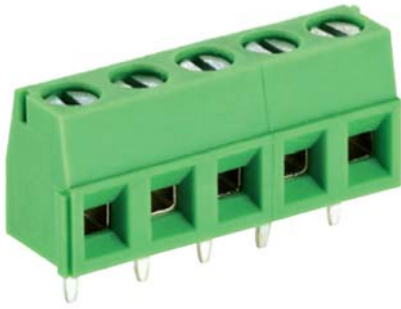

■ 图示(Pic. shown) : TL208V-05P-G12S

General.	PCB terminal block	Rated : 320V,15A , 1.5mm <sup>2</sup>
	Single row , 5.00mm pitch , 02-24 Pole	
	Connection angle: 180°(wire to board)	
	Screw clamp unit: M3 , 0.4N·m	

认证 ( Approval ) :



■ 技术参数 Technical Data	UL standard			IEC standard		
	UL应用组别(UL Application group)	UL Application group			IEC过电压别/污染等级(IEC overvoltage category /pollution degree)	
IEC过电压别/污染等级(IEC overvoltage category /pollution degree)	B	C	D	III / 3	III / 2	II / 2
额定电压(Rated voltage)	300V	--	--	250V	320V	500V
额定电流(Rated current)	15A	--	--	15A	15A	15A
额定连接容量(Rated connection capacity)	26-14AWG Sol&Str			0.34-1.5mm <sup>2</sup>		
绝缘材料(Insulation Material)				PA66 UL94 V-0		
电流承载部件材料和镀层( Material & Plating of Current carrier )				Copper alloy , Tin plated		
接线弹片材料(Material of Clamp spring )				--		
绝缘电阻(Insulation Resistance)				500MΩ or more at DC500V		
耐电压(1分钟)(Withstanding Voltage/1Min)				2000V		
额定冲击电压(Rated surge voltage)				4000V		
接线螺丝(Wire clamp unit Screw) , 最大扭矩( torque Max. )				M3 , 0.4N·m		
固定螺丝(Mounting Screw) , 扭矩(torque)				--		
剥线长度(Wire stripping length)				6 mm		
使用温度(Operating temperature)				-40°C up to +105°C		
焊接方式(Soldering recommend)				Wave soldering ,260°C 8S Max		

■ 订购方式(How to order)

