




PCB terminal block — TLM series (Screwless Type) — TLM-704RA

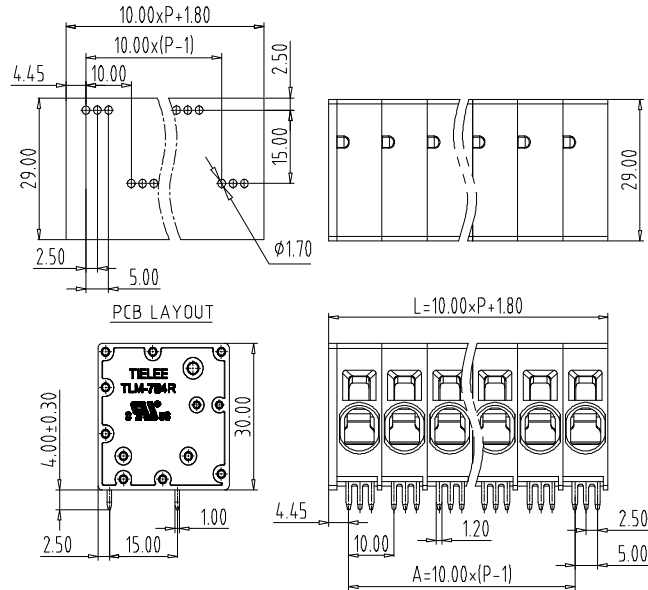


图示(Pic. shown) : TLM-704RA-04P-G12

General.	PCB terminal block	Rated : 1000V, 76A	16mm ²
	Single row , 10.00mm pitch , 02-12 Pole		
	Wiring orientation: 180°(wire-to-board)		
	Screwless Type		

认证 (Approval) :  

技术参数 Technical Data	UL standard			IEC standard		
	UL应用组别(UL Application group)	UL Application group			IEC过电压别/污染等级(IEC overvoltage category /pollution degree)	
IEC过电压别/污染等级(IEC overvoltage category /pollution degree)	B	C	D	III / 3	III / 2	II / 2
额定电压(Rated voltage)	600V	600V	600V	1000V	1000V	1000V
额定电流(Rated current)	66A	66A	5A	76A	76A	76A
额定连接容量(Rated connection capacity)	20-4 AWG Sol&Str			0.75-16mm ² Sol&Str		
绝缘材料(Insulation Material)	PA66 UL94 V-0					
电流承载部件材料和镀层 (Material & Plating of Current carrier)	Copper alloy , Tin plated					
接线弹片材料(Material of Clamp spring)	Stainless Steel (GrNi)					
绝缘电阻(Insulation Resistance)	500MΩ or more at DC500V					
耐电压(1分钟)(Withstanding Voltage/1Min)	--					
额定冲击电压(Rated surge voltage)	8KV					
接线螺丝(Wire clamp unit Screw) , 最大扭矩(torque Max.)	--					
固定螺丝(Mounting Screw) , 扭矩(torque)	--					
剥线长度(Wire stripping length)	18mm					
使用温度(Operating temperature)	-40°C up to +115°C					
焊接方式(Soldering recommend)	Wave soldering ,260°C 5S Max (Single Wave) , 260°C 10S Max(Double Wave)					

订购方式(How to order)

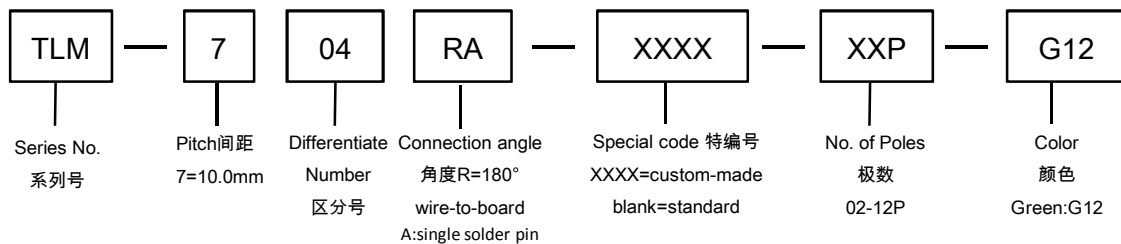

Web: www.tielee.com/www.china-tianli.com/ TEL: +86-574-6347-9600, 6389-6436 Mail : sale@china-tianli.cn

地址: 中国浙江省宁波杭州湾新区庵东工业园区纬三路138号

ADD : 138 , Weisan Rd., Andong Development Zone, Hangzhou Bay Area, Ningbo, Zhejiang, China