
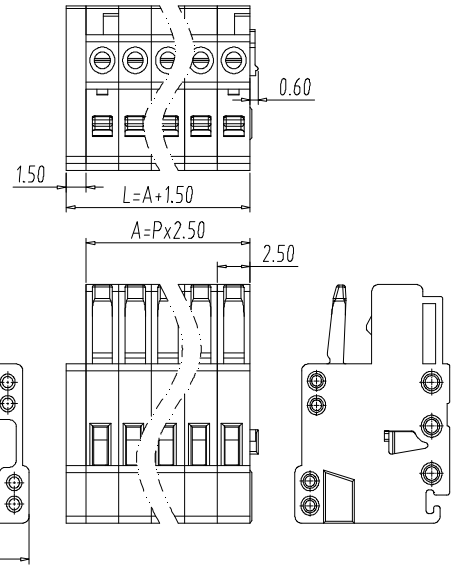



Multi Connection System — TLC series (Female Connector) — TLCP-002




图示(Pic. shown) : TLCP-002-04P-M17

- General:
- Multi Connection System Rated : 160V,6A , 0.5mm²
 - Single row , 2.50mm pitch , 02-24 Pole
 - Wiring orientation: 180°(wire to plug-in)
 - Spring clamp unit.

认证 (Approval) 

技术参数 Technical Data	UL standard			IEC standard		
UL应用组别(UL Application group)	UL Application group			IEC过电压别/污染等级(IEC overvoltage category /pollution degree)		
IEC过电压别/污染等级(IEC overvoltage category /pollution degree)	B	C	D	III / 3	III / 2	II / 2
额定电压(Rated voltage)	150V	/	/	100V	160V	320V
额定电流(Rated current)	4A	/	/	6A	6A	6A
额定连接容量(Rated connection capacity)	28~20AWG Sol&Str			0.20~0.5mm ² Sol&Str		
绝缘材料(Insulation Material)				PA66 ; UL94-V0		
电流承载部件材料和镀层(Material & Plating of Current carrier)				Copper alloy , Tin plated		
接线弹片材料(Material of Clamp spring)				Stainless Steel		
绝缘电阻(Insulation Resistance)				500MΩ or more at DC500V		
耐电压(1分钟)(Withstanding Voltage/1Min)				AC1300V/Min		
额定冲击电压(Rated surge voltage)				2500V		
接线螺丝(Wire clamp unit Screw) , 最大扭矩(torque Max.)				--		
固定螺丝(Mounting Screw) , 扭矩(torque)				--		
剥线长度(Wire stripping length)				5~6mm		
使用温度(Operating temperature)				-40°C up to +115°C		
焊接方式(Soldering recommend)				--		

订购方式(How to order)

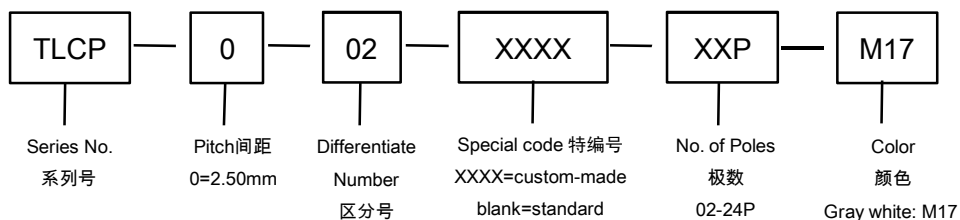

Web:www.tielee.com/www.china-tianli.com/ TEL:+86-574-6347-9600,6389-6436 Mail : sale@china-tianli.cn

地址:中国浙江省宁波杭州湾新区庵东工业园区纬三路138号

ADD : 138 , Weisan Rd.,Andong Development Zone, Hangzhou Bay Area, Ningbo, Zhejiang, China

■ 针座 (Pin header)



P/N : TLCH-002V
Orientation :
90° (plug-in to board)
Rated:160V,6A



P/N : TLCH-002R
Orientation :
180° (plug-in to board)
Rated:160V,6A