
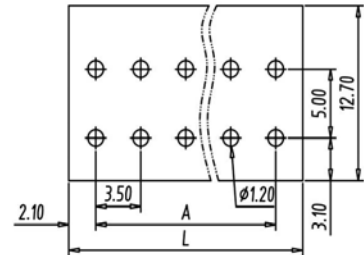
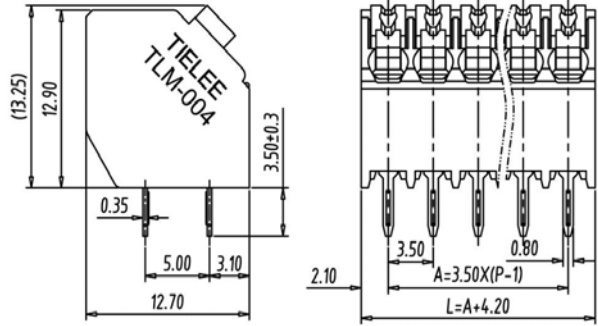



PCB terminal block — TLM series (Screw less Type) — TLM-004AT-3.50

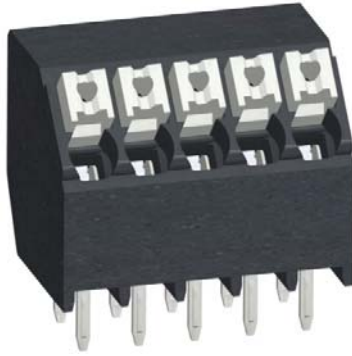


■ 图示(Pic. shown) : TLM-004AT-3.50-05P(K)

| | | |
|----------|--|--|
| General: | PCB terminal block | Rated : 160V, 17.5A 1.5mm ² |
| | Single row , 3.50mm pitch , 02-24 Pole | |
| | Wiring orientation: 45°(wire-to-board) | |
| | Screwless Type | |

认证 (Approval) 

| 技术参数 Technical Data | UL standard | | | IEC standard | | |
|--|--|----------------------|------|--------------------------------|--|--------|
| | UL应用组别(UL Application group) | UL Application group | | | IEC过电压别/污染等级(IEC overvoltage category /pollution degree) | |
| IEC过电压别/污染等级(IEC overvoltage category /pollution degree) | B | C | D | III / 3 | III / 2 | II / 2 |
| 额定电压(Rated voltage) | 300V | -- | 300V | 160V | 160V | 320V |
| 额定电流(Rated current) | 12A | -- | 10A | 17.5A | 17.5A | 17.5A |
| 额定连接容量(Rated connection capacity) | 28-16AWG Sol&Str | | | 0.2~1.5mm ² Sol&Str | | |
| 绝缘材料(Insulation Material) | PAHT UL94 V-0 | | | | | |
| 电流承载部件材料和镀层(Material & Plating of Current carrier) | Copper alloy , Tin plated | | | | | |
| 接线弹片材料(Material of Clamp spring) | Stainless | | | | | |
| 绝缘电阻(Insulation Resistance) | 500MΩ or more at DC500V | | | | | |
| 耐电压(1分钟)(Withstanding Voltage/1Min) | 1600V | | | | | |
| 额定冲击电压(Rated surge voltage) | 2500V | | | | | |
| 接线螺丝(Wire clamp unit Screw) , 最大扭矩(torque Max.) | -- | | | | | |
| 固定螺丝(Mounting Screw) , 扭矩(torque) | -- | | | | | |
| 剥线长度(Wire stripping length) | 8.0-9.0mm | | | | | |
| 使用温度(Operating temperature) | -40°C up to +130°C(UL) / -40°C up to +120°C(IEC) | | | | | |
| 焊接方式(Soldering recommend) | Reflow soldering ,260°C 30S Max | | | | | |

■ 订购方式(How to order)

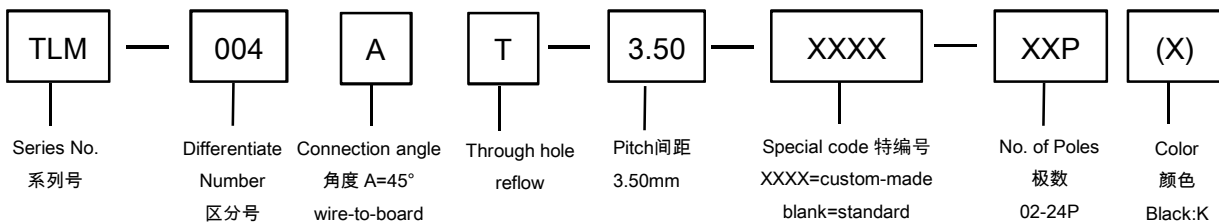

Web:www.tielee.com/www.china-tianli.com/ TEL:+86-574-6347-9600,6389-6436 Mail : sale@china-tianli.cn

地址:中国浙江省宁波杭州湾新区庵东工业园区纬三路138号

ADD : 138 , Weisan Rd.,Andong Development Zone, Hangzhou Bay Area, Ningbo, Zhejiang, China