
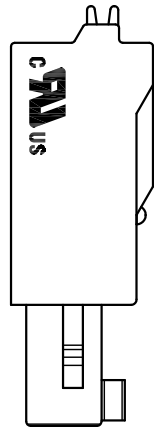
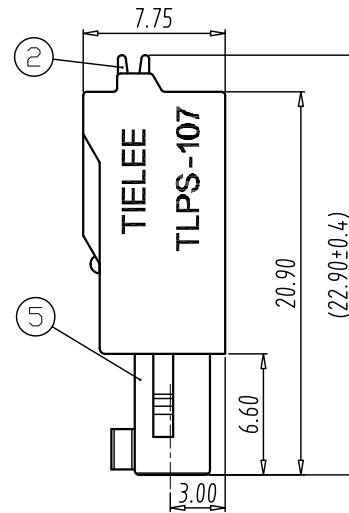
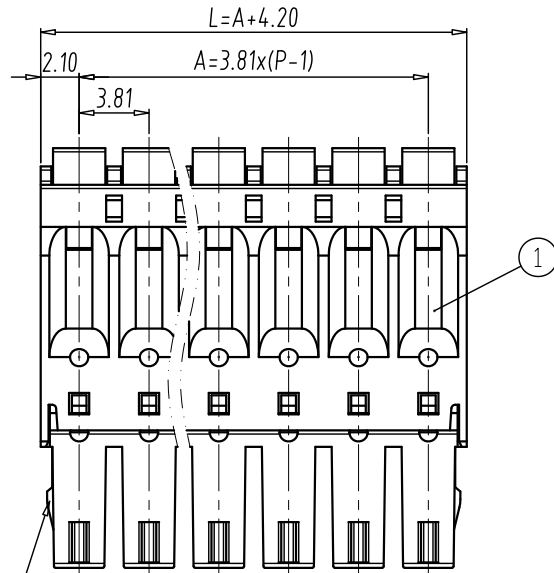


REV	E.C.N NO.	CONTENT	CHK	DATE
V1.0		ORIGINAL	YHZ	2022.07.07

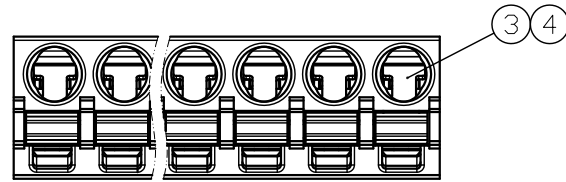

2P-7P 有凸台 (With rising point)
8P-24P 无凸台 (No rising point)

NOTES:

- UL:
Rating:300V, 8A;
Insulation Withstands Voltage:AC1600V/MIN;
Suitable Electric Wire:28AWG~16AWG
- IEC:
Rating:320V, 10A;
Rate Impulse Voltage:2500V;
Insulation Resistance:500MΩ or more at DC500V;
Contact Resistance: ≤5mΩ
Material Group: I;
Pollution Degree:2;
Overvoltage Category: II;
Suitable Electric Wire:0.2mm²~1.5mm²
- Using Temperature Range:-40℃~+115℃
- Strip length:9.5~10.5mm
- RoHS compliance;

DIM	P																
	2	3	4	5	6	7	8	9	10	11	12						
A	3.81	7.62	11.43	15.24	19.05	22.86	26.67	30.48	34.29	38.1	41.91						
L	8.01	11.82	15.63	19.44	23.25	27.06	30.87	34.68	38.49	42.3	46.11						
DIM	P																
	13	14	15	16	17	18	19	20	21	22	23	24					
A	45.72	49.53	53.34	57.15	60.96	64.77	68.58	72.39	76.2	80.01	83.82	87.63					
L	49.92	53.73	57.54	61.35	65.16	68.97	72.78	76.59	80.4	84.21	88.02	91.83					
Total Pitch Tolerances in mm						Nominal dimension range in mm											
over	over	over	over	over	over	over	over	over	over	over	over	over	over				
0	30	53	70	90	115	150	200	250	0	30	53	70	90	115	150	200	250
to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to
30	53	70	90	115	150	200	250	320	30	53	70	90	115	150	200	250	320
±0.20	±0.25	±0.3	±0.35	±0.44	±0.55	±0.70	±0.85	±1.00	±0.25	±0.30	±0.35	±0.44	±0.55	±0.70	±0.80	±0.90	±1.20

5	COVER	1	PA66	UL94 V-0
4	SPRING	P	Stainless	/
3	CLAMP	P	Copper Alloy	Tin Plated
2	LEVER	P	POM	Orange
1	HOUSING	1	PA66	UL94 V-0

DWG.	hyt	DATE	2020.08.28	UNITS	MM	SHEET/OF	1/1
CHK.		DATE		SCALE	2.5:1	A4	
APP.		DATE		NAME	TLPS-107-XXP-X		
				DWGNO.	TLDW-TLPS107XXPX		

