

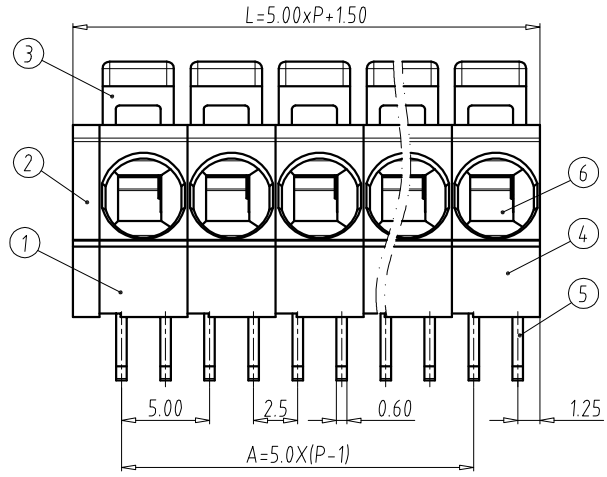


REV	E.C.N NO.	CONTENT	CHK	DATE
V1.0		ORIGINAL	CZM	2021.09.29
V2.0	S2203004	Add 01P	CZM	2022.03.04

- NOTES:**
- UL:**
Rating:300V, 16A;
Insulation Withstands Voltage:AC1600V/MIN;
Suitable Electric Wire:20AWG~12AWG;
Using Temperature Range:-40°C~+115°C;
 - IEC:**
Rating:320V, 16A;
Rate Impulse Voltage:4000V;
Insulation Resistance:500MΩ or more at DC500V;
Contact Resistance: ≤5mΩ
Material Group I ;Pollution Degree:2;
Overvoltage Category:III;
Suitable Electric Wire:0.2mm²~2.5mm²
3.Using Temperature Range:-40°C~+115°C;
 - Strip length:10.0~11.0mm
 - RoHS compliance;

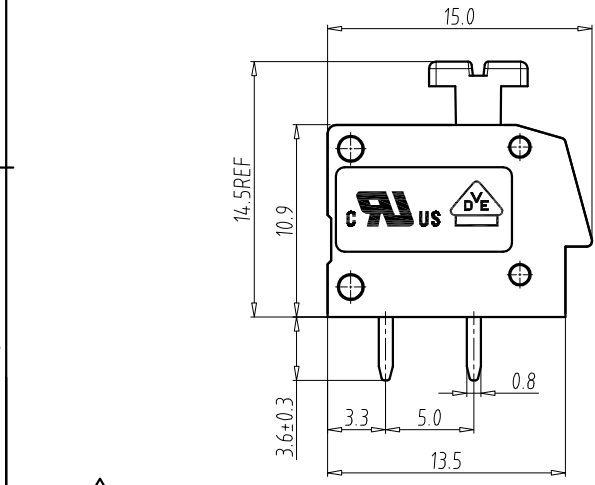

DIM	P	DIM P											
		01	02	03	04	05	06	07	08	09	10	11	12
L		6.5	11.5	16.5	21.5	26.5	31.5	36.5	41.5	46.5	51.5	56.5	61.5
A		0	5	10	15	20	25	30	35	40	45	50	55
DIM	P	DIM P											
		13	14	15	16	17	18	19	20	21	22	23	24
L		66.5	71.5	76.5	81.5	86.5	91.5	96.5	101.5	106.5	111.5	116.5	121.5
A		60	65	70	75	80	85	90	95	100	105	110	115
Total Pitch Tolerances in mm						Nominal dimension range in mm							
over	over	over	over	over	over	over	over	over	over	over	over	over	over
0	30	53	70	90	115	150	200	250	0	30	53	70	90
to	to	to	to	to	to	to	to	to	to	to	to	to	to
30	53	70	90	115	150	200	250	320	30	53	70	90	115
±0.20	±0.25	±0.3	±0.35	±0.44	±0.55	±0.70	±0.85	±1.00	±0.25	±0.30	±0.35	±0.44	±0.55
									±0.70	±0.80	±0.90	±1.20	

ITEM	NAME OF PART	Q'TY	MATERIAL	NOTE
6	SPRING	P	Stainless Steel	/
5	SOLDER PIN	P	COPPER ALLOY	Tin Plated
4	HOUSING 2	1	PA66	UL94-V0
3	LEVER	P	PA66	UL94-V0
2	COVER	1	PA66	UL94-V0
1	HOUSING 1	P-1	PA66	UL94-V0

DWG.	CZM	DATE	2021.09.29	UNITS	MM	SHEET/OF	1/1
CHK.		DATE		SCALE	2.5:1	A4	
APP.		DATE		TLM-213-XXP-X NAME DWGNO TLDW-TLM213XXPX			
TIANLI ELECTRICAL MACHINERY(NINGBO)CO.,LTD.							