



PCB Connector — TLP series (Pin header)— TLPHC-006V

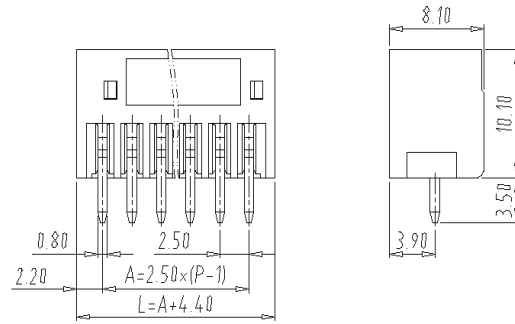

■ 图示(Pic. shown) : TLPHC-006V-06P-G12

General.

PCB Connector Rated : 150V,5A

Single row , 2.50mm pitch , 02-24 Pole


Orientation:90°(plug-in to board)

认证 (Approval) :



技术参数Technical Data	UL standard			IEC standard		
	UL Application group			IEC过电压别/污染等级(IEC overvoltage category /pollution degree)		
UL应用组别(UL Application group)						
IEC过电压别/污染等级(IEC overvoltage category /pollution degree)	B	C	D	III / 3	III / 2	II / 2
额定电压(Rated voltage)	150V	--	--	--	--	--
额定电流(Rated current)	5A	--	--	--	--	--
额定连接容量(Rated connection capacity)				--		
绝缘材料(Insulation Material)				PA66 UL94 V-0		
绝缘材料组别(Material group)				I		
电流承载部件材料和镀层(Material & Plating of Current carrier)				Copper alloy , Tin plated		
接线弹片材料(Material of Clamp spring)				--		
耐电压(1分钟)(Withstanding Voltage/1Min)				1300V		
额定冲击电压(Rated surge voltage)				--		
接线螺丝(Wire clamp unit Screw) , 最大扭矩(torque Max.)				--		
固定螺丝(Mounting Screw) , 扭矩(torque)				--		
剥线长度(Wire stripping length)				--		
使用温度(Operating temperature)				-40°C up to +115°C		
存储温度(Storage temperature)				-40°C up to +70°C		
存储相对湿度(Storage relative humidity)				≤70%		
焊接方式(Soldering recommend)				Wave soldering ,260°C 8S Max		

■ 订购方式(How to order)

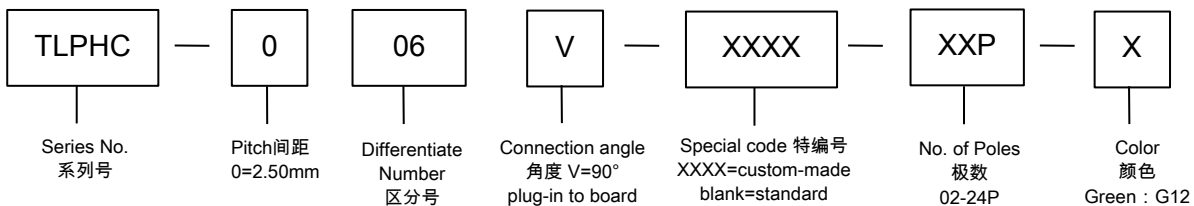

■ 插头 (Female Connector) — single row



P/N : TLPS-006V
Wiring orientation :
180°(wire to plug-in)
Rated : 150V,5A , 0.5mm²
Screw clamp unit