FILE: TLP\001\TLPHL-001R-XXP-AF(X)

REV	E.C.N NO.	CONTENT	CHK	DATE
V0.0		ORIGINAL	ZZW	2024.05.07

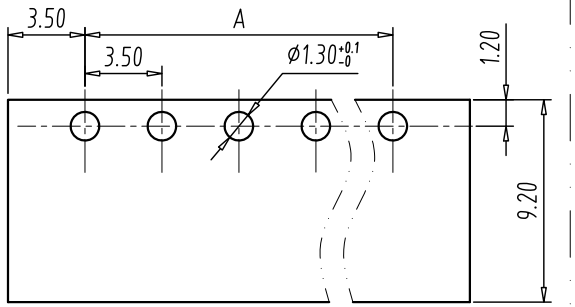

PCB LAYOUT
S=3:1

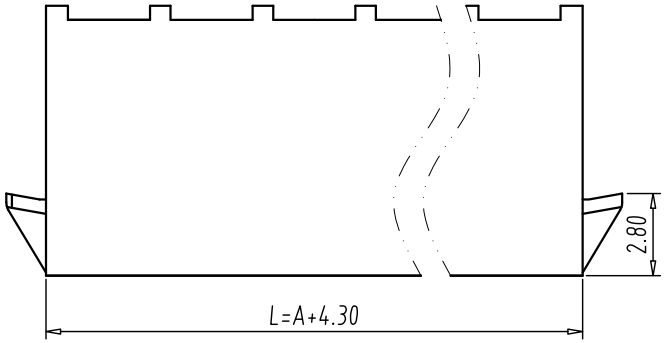

NOTES:
1. UL:
   Rating:300V,13A;
   Insulation Withstands Voltage:AC1600V/MIN;
2. IEC:
   Rating:250V,10A;
   Rate Impulse Voltage:2500V;
   Insulation Resistance:500MΩ or more at DC500V;
   Contact Resistance: ≤5mΩ
   Material Group:IIIa;
   Pollution Degree:2;
   Overvoltage Category:Ⅱ;
3. Using Temperature Range:-40℃～+115℃;
4. RoHS compliance;

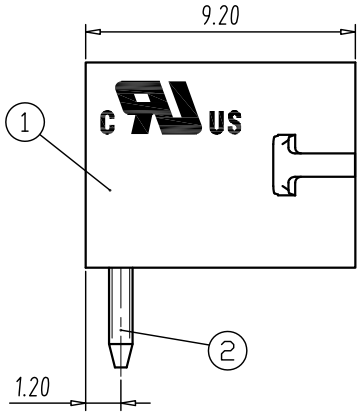

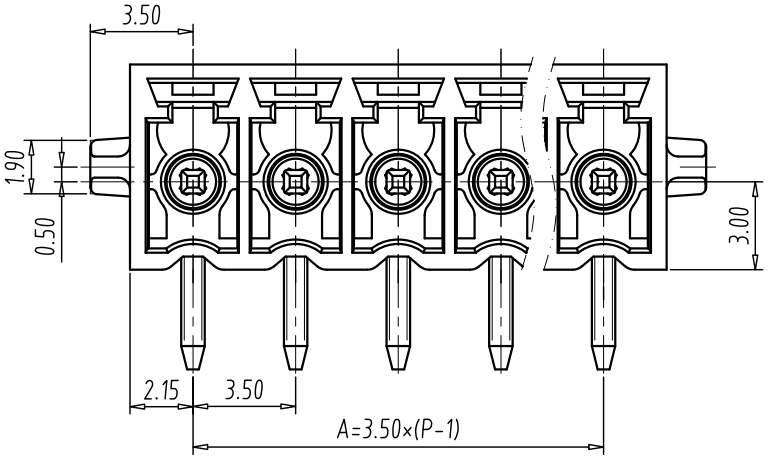

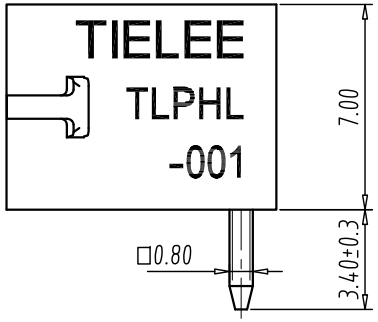

DIM \ P	02	03	04	05	06	07	08	09	10	11	12
L	7.8	11.3	14.8	18.3	21.8	25.3	28.8	32.3	35.8	39.3	42.8
A	3.5	7	10.5	14	17.5	21	24.5	28	31.5	35	38.5

DIM \ P	13	14	15	16	17	18	19	20	21	22	23	24
L	46.3	49.8	53.3	56.8	60.3	63.8	67.3	70.8	74.3	77.8	81.3	84.8
A	42	45.5	49	52.5	56	59.5	63	66.5	70	73.5	77	80.5

Total Pitch Tolerances in mm									Nominal dimension range in mm								
over 0 to 30	over 30 to 53	over 53 to 70	over 70 to 90	over 90 to 115	over 115 to 150	over 150 to 200	over 200 to 250	over 250 to 320	over 0 to 30	over 30 to 53	over 53 to 70	over 70 to 90	over 90 to 115	over 115 to 150	over 150 to 200	over 200 to 250	over 250 to 320
±0.20	±0.25	±0.3	±0.35	±0.44	±0.55	±0.70	±0.85	±1.00	±0.25	±0.30	±0.35	±0.44	±0.55	±0.70	±0.80	±0.90	±1.20

ITEM	NAME OF PART	Q"TY	MATERIAL	NOTE
2	SOLDER PIN	P	COPPER ALLOY	Tin Plated
1	HOUSING	1	PA66	UL94V-0

DWG.	ZZW	DATE	2024.05.07	UNITS	MM
CHK.		DATE		SCALE	4 : 1
APP.		DATE			

SHEET/OF 1/1 | A4

TIANLI
ELECTRICAL MACHINERY(NINGBO)CO.,LTD.

NAME: TLPHL-001R-XXP-AF(X)

DWGNO. TLDW-TLPHL001RXXPAFX