


PCB Connector — TLP series (Female Connector)— TLPS-305V

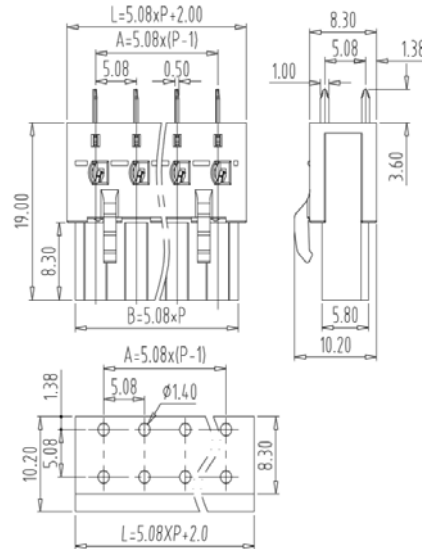

■ 图示(Pic. shown) : TLPS-305V-03P-G12


General. PCB Connector Rated : 630V,20A
Single row , 5.08mm pitch , 02 ~ 24 Pole
Orientation: 90°(plug-in to board)

认证 (Approval) :




■ 技术参数Technical Data	UL standard			IEC standard		
	UL Application group			IEC过电压别/污染等级(IEC overvoltage category /pollution degree)		
UL应用组别(UL Application group)	B	C	D	III / 3	III / 2	II / 2
IEC过电压别/污染等级(IEC overvoltage category /pollution degree)						
额定电压(Rated voltage)	300V	--	300V	320V	320V	630V
额定电流(Rated current)	16A	--	10A	20A	20A	20A
额定连接容量(Rated connection capacity)	--			--		
刚性导线横截面 (AWG) (Conductor cross section,solid)				--		
柔性导线横截面 (AWG) (Conductor cross section,stranded)				--		
刚性导线横截面 (mm2) (Conductor cross section,rigid)				--		
柔性导线横截面 (mm2) (Conductor cross section,flexible)				--		
柔性导线横截面, 不带绝缘套管的冷压头(mm2) (Conductor cross section flexible , with ferrule without plastic				--		
柔性导线横截面, 带绝缘套管的冷压头(mm2) (Conductor cross section flexible , with ferrule with plastic sleeve)				--		
2根具有相同横截面的导线, 柔性, 带TWIN套管及塑料套管(mm2) (2 conductors with the same section flexible with TWIN ferrule and plastic sleeve)				--		
绝缘材料(Insulation Material)				PA66 UL94 V-0		
绝缘材料组别(Material group)				I		
电流承载部件材料和镀层(Material & Plating of Current carrier)				Copper alloy , Tin plated		
接线弹片材料(Material of Clamp spring)				--		
耐电压(1分钟)(Withstanding Voltage/1Min)				2000V		
额定冲击电压(Rated surge voltage)				4000V		
接线螺丝(Wire clamp unit Screw) , 最大扭矩(torque Max.)				--		
固定螺丝(Mounting Screw) , 扭矩(torque)				--		
剥线长度(Wire stripping length)				--		
使用温度(Operating temperature)				-40°C up to +115°C		
存储温度(Storage temperature)				-40°C up to +70°C		
存储相对湿度(Storage relative humidity)				≤70%		
焊接方式(Soldering recommend)				Wave soldering ,260°C 8S		

■ 订购方式(How to order)

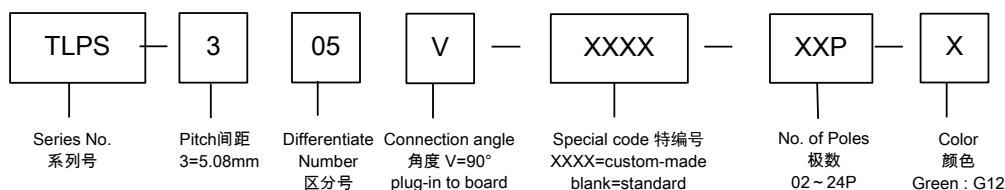


■ 编码片 Coding key




P/N:
TLPCK-002-S

■ 针座 (Pin header) — single row




P/N : TLPH-300V
Orientation :
90° (plug-in to board)
Rated:320V,20A
Open side(stack available)




P/N : TLPH-300R
Orientation :
180° (plug-in to board)
Rated:320V,20A
Open side(stack available)

■ 针座 (Pin header) — single row



P/N : TLPHC-300V
Orientation :
90° (plug-in to board)
Rated : 320V,20A
Closed side




P/N : TLPHC-300R
Orientation :
180° (plug-in to board)
Rated : 320V,20A
Closed side

■ 针座 (Pin header) — single row



P/N : TLPH-300A
Orientation :
45° (plug-in to board)
Rated : 630V,20A
Open side(stack available)



P/N : TLPHC-300A
Orientation :
45° (plug-in to board)
Rated : 630V,20A
Closed side

■ 针座 (Pin header) — single row



P/N : TLPH-300R-1603
Orientation :
180° (plug-in to board)
Rated:320V,20A
Open side(stack available)



P/N : TLPHC-300R-1603
Orientation :
180° (plug-in to board)
Rated:320V,20A
Closed side

■ 针座 (Pin header) — single row



P/N : TLPHS-304
Orientation :
180° (plug-in to wire)
Rated : 320V,20A
Screw clamp unit: M3 , 0.5Nm




P/N : TLPHS-304
Orientation :
180° (plug-in to wire)
Rated : 320V,20A
Screw clamp unit: M3 , 0.5Nm

■ 针座 (Pin header) — dual row staggered



P/N : TLPHD-303V
Orientation :
90° (plug-in to board)
Rated : 320V,20A
Open side(stack available)



P/N : TLPHD-303R
Orientation :
180° (plug-in to board)
Rated : 320V,20A
Open side(stack available)

■ 针座 (Pin header) — dual row staggered




P/N : TLPHDC-303V
Orientation :
90° (plug-in to board)
Rated : 320V,20A
Closed side



P/N : TLPHDC-303R
Orientation :
180° (plug-in to board)
Rated : 320V,20A
Closed side

■ 针座 (Pin header) — dual row in 1 plane



P/N : TLPHDC-300V
Orientation :
90° (plug-in to board)
Rated:320V,20A
Closed side



P/N : TLPHDC-300R
Orientation :
180° (plug-in to board)
Rated : 320V,20A
Closed side